

Bullseye™ On-Metal

Overview

Frequency Band
NFC 13.56 MHz

Chip
NXP NTAG213

Antenna Dimensions
Ø 35 mm / 1.38 in

International Standard
ISO 14443A

Industry Segments
Industrial Applications
Media and Document Management

Applications
NFC
Electronics

RoHs
EU Directive 2011/65/EU and
2015/863 Compliant

REACH
Regulation (EC) No 1907/2006



Flexible ferrite-based NFC tags for multiple use

Our NFC Bullseye™ On-Metal tags have been specifically designed to work on metallic objects. They open the door to all applications involving the tagging of metal surfaces that need to be identified or interacted with, such as metallic parts, tools, machines, spare parts and even domestic items.

In our Bullseye™ On-Metal tags, we combine flexible ferrite materials with a performance-optimized antenna design. The super-thin ferrite-based inlay is produced by applying a layer of ferrite material to the inlay, which isolates the magnetic field from the metal surface. Ferrite redirects the reader's inductive field, and prevents energy from being wasted as heat within the metallic surface.

The flexible ferrite-based NFC inlays are suitable for roll-to-roll manufacturing processes, which make onward processing much easier and more cost-effective, and allow converters to overprint the inlays if required.


Bullseye™ On-Metal is equipped with the NXP NTAG213 IC. This chip offers (UID) mirror functionality that enables the IC's serial number to be mirrored as part of its encoded data, and identifies unique reads from the application perspective.

Our inlays and tags are compliant with ISO 9001:2008 Quality Management and ISO 14001:2004 Environmental Management. This ensures a reliable and state-of-the-art product that meets a variety of application needs, where high performance is a critical parameter.

Technical features

Chip	NXP NTAG213
User Memory	144 bytes
Product Code	3006704
Delivery Format	Wet inlay
Die-cut Dimension	Ø 38 mm / 1.496 in
Inlay Substrate	PET
Face Sheet	White PP
Standard Pitch	41 mm / 1.614 in
Web Width	44mm / 1.732 in
Core Size	76 mm / 3 in
Quantity / Reel	2000 pcs/reel 4000 pcs/box
Operating Temperature	-40 °C to 85 °C -40 °F to 185 °F

Comparison standard inlays with spacer and inlays with ferrite material

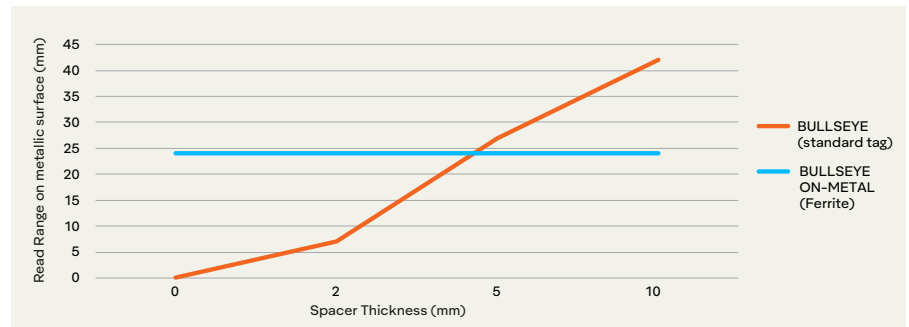

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact

North America: +1-866-903-7343 (toll free US)

International: +1-678-617-2359



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.